

CBB23 金属化聚丙烯膜轴向电容器

产品特性



- 金属化聚丙烯膜箔式，卷绕结构
- 损耗小，内部温升小
- 外包聚酯胶带纸，两端灌注阻燃性环氧树脂

典型应用

- 主要应用于大屏幕显示器及彩电行逆程电路
- 适用于高脉冲、大电流电路以及电子镇流器

技术要求

| | |
|-------|--------------------------------|
| 引用标准 | GB/T 10190(IEC 60384-16) |
| 气候类别 | 40/105/21 |
| 耐电压 | 1.6U _R (5s) |
| 额定电压 | 100V/160V,250V,400V,630V,1000V |
| 电容量偏差 | J:±5% K:±10% M:±20% |
| 电容量范围 | 0.022μF~10μF |
| 损耗角正切 | ≤0.002% (20℃,1KHZ) |
| 绝缘电阻 | ≥25000 MΩ (20℃,100V,1 min) |

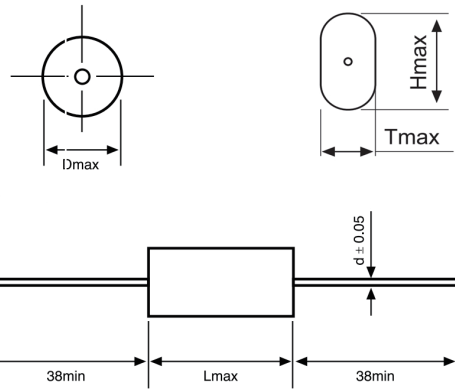

外形尺寸

单位: mm

| C _N (μF) | 250VDC | | | | 400VDC | | | | 630VDC | | | | 1000VDC | | | |
|---------------------|--------|------|------|-----|--------|------|------|-----|--------|------|------|-----|---------|------|------|-----|
| | L | H | T | d | L | H | T | d | L | H | T | d | L | H | T | d |
| 0.022 | | | | | 16 | 7.5 | 4.5 | 0.8 | 16 | 8.5 | 5.5 | 0.8 | 16 | 9.5 | 6 | 0.8 |
| 0.033 | 16 | 7.5 | 4.5 | 0.6 | 16 | 8.5 | 4.5 | 0.8 | 16 | 9.5 | 6 | 0.8 | 16 | 11 | 7 | 0.8 |
| 0.047 | 16 | 8.5 | 4.5 | 0.8 | 16 | 10 | 5.5 | 0.8 | 16 | 10 | 5.5 | 0.8 | 16 | 11.5 | 7 | 0.8 |
| 0.0068 | 16 | 9 | 5.5 | 0.8 | 16 | 10 | 5.5 | 0.8 | 16 | 11 | 6.5 | 0.8 | 16 | 12.5 | 8.5 | 0.8 |
| 0.1 | 16 | 10 | 5.5 | 0.8 | 20 | 10.5 | 6 | 0.8 | 20 | 11.5 | 5.5 | 0.8 | 20 | 11 | 7 | 0.8 |
| 0.22 | 20 | 11 | 6.5 | 0.8 | 25.5 | 11 | 7 | 0.8 | 20 | 13 | 8.5 | 0.8 | 20 | 15.5 | 11 | 0.8 |
| 0.33 | 25.5 | 9.5 | 5 | 0.8 | 25.5 | 11.5 | 5.5 | 0.8 | 25.5 | 13.5 | 7.5 | 0.8 | 25.5 | 15.5 | 9.5 | 0.8 |
| 0.47 | 25.5 | 11 | 6 | 0.8 | 30.5 | 12 | 7.5 | 0.8 | 25.5 | 14.5 | 9.5 | 0.8 | 30.5 | 15.5 | 11 | 0.8 |
| 0.68 | 30.5 | 11 | 6 | 0.8 | 30.5 | 12 | 7.5 | 0.8 | 30.5 | 15 | 10.5 | 0.8 | 30.5 | 18 | 13 | 0.8 |
| 1 | 30.5 | 13.5 | 7 | 0.8 | 30.5 | 15 | 8.5 | 0.8 | 35.5 | 17 | 10.5 | 0.8 | 35.5 | 20 | 13.5 | 1 |
| 1.5 | 30.5 | 15.5 | 9 | 0.8 | 35.5 | 17 | 11 | 0.8 | 35.5 | 19.5 | 13.5 | 0.8 | 35.5 | 24 | 16.5 | 1 |
| 2.2 | 35.5 | 17 | 9.5 | 0.8 | 35.5 | 19.5 | 11.5 | 0.8 | 35.5 | 23.5 | 13.5 | 0.8 | | | | |
| 3.3 | 35.5 | 19.5 | 11.5 | 0.8 | 35.5 | 22 | 14.5 | 0.8 | | | | | | | | |
| 4.7 | 35.5 | 22 | 14 | 0.8 | 35.5 | 36 | 17.5 | 0.8 | | | | | | | | |
| 6.8 | 35.5 | 25.5 | 17.5 | 0.8 | 45.5 | 27 | 17.5 | 0.8 | | | | | | | | |
| 10 | 45.5 | 27 | 17.5 | 0.8 | | | | | | | | | | | | |